


WS-PR - Guiding Elements

Polyester Resin

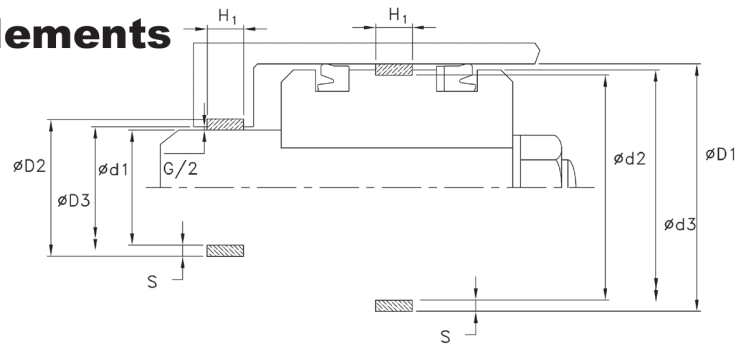

Temperature: -40/250F [-40/121C]

Pressure: 60 000 PSI [4138 BAR]

Compressive Strength

Ref.Number	Housing Dimensions			
	H1	S	d1	D1
WS0056025-PR/1	5.60	2.50	25.00 - 30.00	35.00 - 70.00
WS0056025-PR/2	5.60	2.50	25.00 - 50.00	55.00 - 110.00
WS0056025-PR/3	5.60	2.50	50.00 - 100.00	105.00 - 210.00
WS0061040-PR/1	6.10	4.00	60.00 - 80.00	68.00 - 170.00
WS0061040-PR/2	6.10	4.00	80.00 - 150.00	158.00 - 310.00
WS0061040-PR/3	6.10	4.00	150.00 - 250.00	258.00 - 510.00
WS0097025-PR/1	9.70	2.50	25.00 - 40.00	45.00 - 90.00
WS0097025-PR/2	9.70	2.50	35.00 - 70.00	75.00 - 150.00
WS0097025-PR/3	9.70	2.50	70.00 - 150.00	155.00 - 310.00
WS0097030-PR/1	9.70	3.00	40.00 - 50.00	56.00 - 100.00
WS0097030-PR/2	9.70	3.00	50.00 - 100.00	106.00 - 210.00
WS0097030-PR/3	9.70	3.00	100.00 - 150.00	156.00 - 310.00
WS0097040-PR/1	9.70	4.00	60.00 - 80.00	88.00 - 170.00
WS0097040-PR/2	9.70	4.00	80.00 - 150.00	158.00 - 310.00
WS0097040-PR/3	9.70	4.00	150.00 - 250.00	258.00 - 510.00
WS0100020-PR/1	10.00	2.00	25.00 - 41.00	45.00 - 90.00
WS0100020-PR/2	10.00	2.00	35.00 - 70.00	74.00 - 160.00
WS0100020-PR/3	10.00	2.00	70.00 - 155.00	159.00 - 310.00
WS0128030-PR/1	12.80	3.00	50.00 - 60.00	66.00 - 120.00
WS0128030-PR/2	12.80	3.00	60.00 - 104.00	110.00 - 220.00
WS0128030-PR/3	12.80	3.00	90.00 - 149.00	155.00 - 300.00
WS0130025-PR/1	13.00	2.50	40.00 - 50.00	55.00 - 110.00
WS0130025-PR/2	13.00	2.50	50.00 - 100.00	105.00 - 210.00
WS0130025-PR/3	13.00	2.50	90.00 - 180.00	185.00 - 370.00



NOTE: MINIMUM LINE ORDER MAY APPLY

WS-PR SERIES - POLYESTER RESIN

Ref.Number	Housing Dimensions			
	H1	S	d1	D1
WS0150020-PR/1	15.00	2.00	35.00 - 50.00	54.00 - 110.00
WS0150020-PR/2	15.00	2.00	50.00 - 100.00	104.00 - 210.00
WS0150020-PR/3	15.00	2.00	90.00 - 180.00	184.00 - 370.00
WS0150025-PR/1	15.00	2.50	40.00 - 50.00	55.00 - 110.00
WS0150025-PR/2	15.00	2.50	50.00 - 100.00	105.00 - 210.00
WS0150025-PR/3	15.00	2.50	90.00 - 180.00	185.00 - 370.00
WS0150030-PR/1	15.00	3.02	50.00 - 75.00	81.00 - 160.00
WS0200025-PR/1	20.00	2.50	50.00 - 80.00	85.00 - 170.00
WS0200025-PR/2	20.00	2.50	75.00 - 150.00	155.00 - 310.00
WS0200025-PR/3	20.00	2.50	125.00 - 250.00	255.00 - 510.00
WS0200030-PR/1	20.00	3.00	55.00 - 80.00	86.00 - 170.00
WS0200030-PR/2	20.00	3.00	80.00 - 150.00	156.00 - 310.00
WS0200030-PR/3	20.00	3.00	140.00 - 250.00	256.00 - 510.00
WS0200040-PR/1	20.00	4.00	60.00 - 80.00	88.00 - 170.00
WS0200040-PR/2	20.00	4.00	80.00 - 150.00	158.00 - 310.00
WS0200040-PR/3	20.00	4.00	150.00 - 250.00	258.00 - 510.00
WS0250025-PR/1	25.00	2.50	60.00 - 80.00	85.00 - 170.00
WS0250025-PR/2	25.00	2.50	70.00 - 150.00	155.00 - 310.00
WS0250025-PR/3	25.00	2.50	125.00 - 250.00	255.00 - 510.00
WS0250040-PR/1	25.00	4.00	120.00 - 150.00	158.00 - 310.00
WS0250040-PR/2	25.00	4.00	150.00 - 250.00	258.00 - 510.00
WS0300040-PR/1	30.00	4.00	120.00 - 150.00	158.00 - 310.00
WS0300040-PR/2	30.00	4.00	150.00 - 250.00	258.00 - 510.00
WS0400040-PR/1	40.00	4.00	170.00 - 200.00	208.00 - 410.00
WS0400040-PR/2	40.00	4.00	200.00 - 300.00	308.00 - 610.00

**METRIC SIZE
GUIDING ELEMENTS**



NOTE: MINIMUM LINE ORDER MAY APPLY

www.kcg.com.mx

N 2

+52 fl ' Ł' , %\$' \$, '